
Pantagruel picnic

© design by Dirk Wynants

Galvanised version Powder-coated version Backrest Cushion Floor fastening Protection felt



Pantagruel picnic

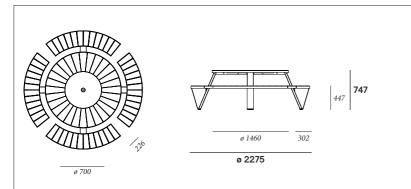



BOX 3: SUPPORTS



BOX 2: 2 BENCHES



BOX 4: LEGS + MOUNTING KIT




	L	W	Н	Qty (#)	Volume (m³)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Box 1	1530	1500	100	1	0,23	69,00	63,20	5,80
Box 2	1480	540	100	2	0,16	62,80	57,60	5,20
Box 3	470	160	145	1	0,01	12,00	11,80	0,20
Box 4	1000	340	290	1	0,01	26,40	22,40	4,00
				total:	0,41	170,20	155,00	15,20
Box 1	1530	1500	100	1	0,23	69,00	63,20	5,80
Box 2	1480	540	100	2	0,16	62,80	57,60	5,20
Box 3	470	160	145	1	0,01	12,00	11,80	0,20
Box 4	1000	340	290	1	0,01	26,40	22,40	4,00
				total:	0,41	170,20	155,00	15,20
	Box 2 Box 3 Box 4 Box 1 Box 2 Box 3	Box 1 1530 Box 2 1480 Box 3 470 Box 4 1000 Box 1 1530 Box 2 1480 Box 3 470	Box 1 1530 1500 Box 2 1480 540 Box 3 470 160 Box 4 1000 340 Box 1 1530 1500 Box 2 1480 540 Box 3 470 160	Box 1 1530 1500 100 Box 2 1480 540 100 Box 3 470 160 145 Box 4 1000 340 290 Box 1 1530 1500 100 Box 2 1480 540 100 Box 3 470 160 145	Box 1 1530 1500 100 1 Box 2 1480 540 100 2 Box 3 470 160 145 1 Box 4 1000 340 290 1 total: Box 1 1530 1500 100 1 Box 2 1480 540 100 2 Box 3 470 160 145 1 Box 4 1000 340 290 1	Box 1 1530 1500 100 1 0,23 Box 2 1480 540 100 2 0,16 Box 3 470 160 145 1 0,01 Box 4 1000 340 290 1 0,01 total: 0,41 Box 1 1530 1500 100 1 0,23 Box 2 1480 540 100 2 0,16 Box 3 470 160 145 1 0,01 Box 4 1000 340 290 1 0,01	Box 1 1530 1500 100 1 0,23 69,00 Box 2 1480 540 100 2 0,16 62,80 Box 3 470 160 145 1 0,01 12,00 Box 4 1000 340 290 1 0,01 26,40 total: 0,41 170,20 Box 1 1530 1500 100 1 0,23 69,00 Box 2 1480 540 100 2 0,16 62,80 Box 3 470 160 145 1 0,01 12,00 Box 4 1000 340 290 1 0,01 26,40	Box 1 1530 1500 100 1 0,23 69,00 63,20 Box 2 1480 540 100 2 0,16 62,80 57,60 Box 3 470 160 145 1 0,01 12,00 11,80 Box 4 1000 340 290 1 0,01 26,40 22,40 total: 0,41 170,20 155,00 Box 1 1530 1500 100 1 0,23 69,00 63,20 Box 2 1480 540 100 2 0,16 62,80 57,60 Box 3 470 160 145 1 0,01 12,00 11,80 Box 4 1000 340 290 1 0,01 26,40 22,40


extremis[®]

The content of this document, in particular the mentioned models, is protected by copyrights and/or design rights. The present document and its content is communicated to you for information purposes only. Any partial or total reproduction or any other use without our prior written permission is strictly prohibited. This technical sheet remains subject to possible changes. All dimensions are in mm, unless mentioned otherwise. Extremis is not responsible for the errors in the documentation of products. All measurements are approximate and are provided for informational purposes only.


Backrest

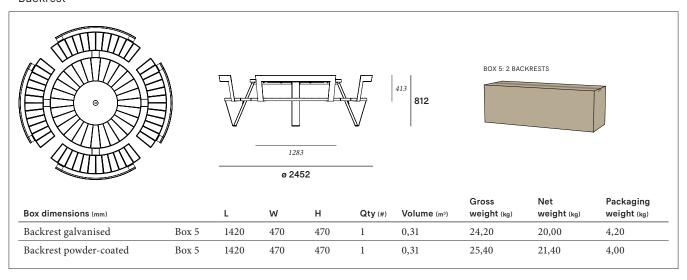


Cushions

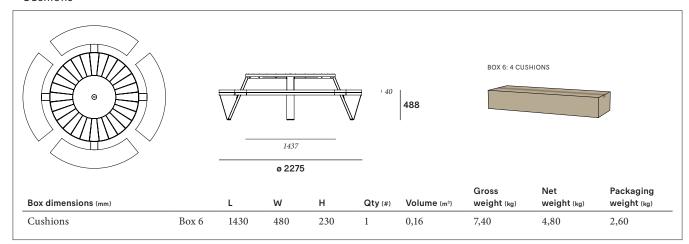

Floor fastening

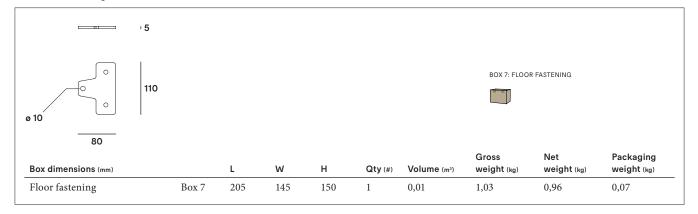

Protection felt

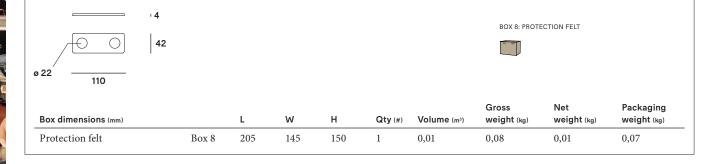



Tabletop & benches





Iroko hardwood*

Hellwood*

Frame, legs & backrest





Galvanised steel

Structured powdercoating*

Lazy Susan rotating tabletop



HPL*

Cushions



Sunbrella*

*Subject to change, check price list or www.extremis.com

Materials	Key facts	Thickness	Layer thickness	Density	In/ outdoor	Water	UV colour fastness	Flame retarding
		mm	micron					
Iroko tabletop & benches	 Durability CLASS 1 Feels comfortable in all weather conditions Advisable to oil the wood 	20	n.a.	600 à 700 kg/m³	Outdoor & indoor	n.a.	Untreated wood turns grey after a while	/
Hellwood tabletop & benches www.pefc.org Promoting sustainable forest management PEFC PEFC/07-31-47/83	Durability CLASS 1 Carries the PEFC™ label for durable forestry Feels comfortable in all weather conditions Advisable to oil the wood	20	n.a.	+/- 600 kg/m³	Outdoor & indoor	n.a.	Untreated wood turns grey after a while	/
Hot dip galvanised steel legs, frame and backrests	 Most durable method for protecting metal from rusting Protective layer Very long life span 100% recyclable Cradle to Cradle Certified™ 	2-6	50 - 100	7,50 10³kg/m³	Outdoor & indoor	n.a.	Very good, gal- vanisation will however become less shiny when used outdoors	NEN- EN13501- 1 A1 *
Structured powder- coated electro gal- vanised steel frame, bench supports & backrest	 Easy to clean Electro galvanised (for protection against rust), then powdercoated More scratch-resistant than non structured powder-coating 	4-6	+/- 100	7,50 10 ³ kg/m ³	Outdoor & indoor	n.a.	Very good: colour can fade to some extent when exposed to UV	NEN- EN13501- 1 A1 *
Structured powder- coated stainless steel legs	Easy to clean Stainless steel (for protection against rust), then powder-coated More scratch-resistant than non structured powder-coating	2	+/- 80	8,00 10 ³ kg/m ³	Outdoor & indoor	n.a.	Very good: colour can fade to some extent when exposed to UV	NEN- EN13501- 1 A1 *
High pressure laminate Lazy Susan	 Manufactured under high pressure Reinforced with wood fibres Flat panel High impact resistance Easy to clean 	13	n.a.	1,40 10 ³ kg/m ³	Outdoor & indoor	n.a.	>6 (EN438- 2:27) en (ASTM G53-91)	/
Sunbrella cushions	 100% Sunbrella Acrylic Best outdoor fabric available for making cushions Dirt repellent Not waterproof, store inside! Machine washable at max. 30°C. Ironing restores the protective layer 	0,50	n.a.	260 g/m²	Outdoor & indoor	The fabric has a water column of 350 mm (EN 20811)	7/8 (ISO 105-B02)	/

^{*} NEN-EN13501-1 A1

Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.

Warnings A

General

- Do not use any sharp tools to open the packaging.
 We strongly advise against using power tools.
- Tripping hazard, mind your step.
- · Do not put out cigarettes on the table.
- Not grafitti proof.
- · Do not leave children unattended whilst playing on the table.
- To avoid danger of suffocation, keep plastic bags away from babies and children.
- · Colours can differ over years and from batch to batch.

Product

- Do not stand or jump on the table.
- Do not drag the table, but carry it with minimum 2 people.
- Anchoring the product has to be done by qualified people.
- For anchoring: use suitable bolts or screws from a specialized store depending on the material your terrace is made of.
- There is protection felt for delicate floors or indoor use.
- · Do not stand on the Lazy Susan or on the benches.
- The white Lazy Susan relfects in the sunlight.
- Mind your fingers whilst assembling the Lazy Susan.
- · Max. 3 people or 240 kg per bench.

- · When delivered, the wood is untreated.
- · Wood is a natural material and its look is different for every slat, plank and tree.
- · Wood will gradually become rougher and start to turn grey as a consequence of exposure to the sun and rain. We recommend oiling the wood at regular intervals depending from location and general weather conditions.
- · Clean regularly with mild detergent. Never use a high pressure cleaner as this will roughen the wood's smooth surface and irreparably damage the wood's fiber.
- Thorough cleaning with Extremis Wood Cleaner.
- We strongly recommend that you treat your wood with wood protector to protect it from stains - Small cracks and crevices can also appear as part of this process. We strongly advise everyone to treat the furniture with our Wood Protector.

Galvanised steel

- · Galvanisation will become less shiny when used outdoors.
- Flame retarding NEN-EN13501-1 A1 Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.
- · Possible impurities in the immersion tank can cause

- black marks during galvanization, which are intrinsic to $% \left(1\right) =\left(1\right) \left(1\right) \left($ this industrial finishing technique.
- White marks on this zinc layer are also intrinsic to this procedure and will disappear when the furniture is put
- This industrial finishing technique may result in a rougher surface. This is intrinsic to the process.

Powder-coating

- White powder-coating requires more maintenance.
- Do not use abrasive scouring powders or scourers as they will scratch the surface.
- Colour can fade to some extent when exposed to UV.
 Flame retarding NEN-EN13501-1 A2-sl Satisfying the same criteria as Class B for the SBI-test according to EN13823. In addition, under conditions of a fully developed fire these products will nog significantly contribute to the fire load and fire growth
- · Dark colors can get very hot in sunny weather.

• UV colour fastness: >6 (EN438-2:27) en (ASTM G53-91)

Sunbrella

- Not waterproof, store inside!
- · Shake or brush off loose dirt immediately.
- UV colour fasteness: 7/8 (ISO 105-B02).

Applications

Residential: the perfect family picnic table for your terrace, patio or courtyard.

Project: hotel and catering industry, company terraces, public spaces, squares, event venues, schools, ...

Floor fastening

Pantagruel comes with an optional floor anchoring set: four steel plates to be fixed with



Good to know

- PEFC[™] certified wood originates from sustainably managed forests.
- The hole in the tabletop to place a parasol in is ø65 mm.
- Pantagruel picnic combines perfectly with Inumbra ø350, ø400 & Inumbrina ø380. For both combinations, a connection piece is required



· Pantagruel picnic is fitted with a Lazy Susan, a central rotating tray, to easily pass things through. The Lazy Susan can be fixed for use in public spaces



Awards



Maintenance

Find maintenance instructions at the downloads section of extremis.com for:

POWDER-COATED PARTS

- · White powder-coating obviously requires more maintenance.
- · Clean stains with a magic eraser.

GALVANISED PARTS

How to repair a damaged zinc layer.

- · Clean regularly with mild detergent.
- Thorough cleaning with Extremis Wood Cleaner.
- · Oil the wood with Extremis Wood Protector. We recommend oiling the wood at regular intervals depending from location and general weather
- · In order to smoothen the surface again after a thorough cleaning, lightly sand your wood with 80 grit sanding paper or a sanding pad.

RECOMMENDED USAGE

• For Extremis Wood Protector:



Website

www.extremis.com/pantagruelpicnic

F.a.q.

Q: Do you need to oil the wood?

A: Just like other types of wood, Iroko will gradually become rougher and start to turn grey as a consequence of exposure to the sun and rain. Small cracks and crevices can also appear as part of this process. We strongly advise everyone to treat the furniture with our Wood Protector. This 100% natural oil controls the moisture level within the wood, which makes the planks stay stable for longer, and the layer of oil also helps to prevent spilled liquids from being absorbed, so that stains tend to stay superficial. It is best to repeat this treatment at regular intervals.